

ROUND CONTROL DAMPER



YOUNG REGULATOR

20910 Miles Parkway • Cleveland, OH 44128
 (216) 663-5646 • (216) 663-1830 fax

SUBMITTAL DATA

Model 4015

**TWO POSITION – MOTORIZED CONTROL
 Drive Open – Drive Closed**

Application and Design

The Young Regulator model 4015 round, 2-position motorized damper is ideal for zone control, air inlet and exhaust air vents. 4015 is similar to our 4010 motorized round damper except that it is powered in both directions, providing extra power and quieter operation.

Ratings

- Pressure:** 1" W.C.
- Velocity:** 1,000 CFM
- Temperature:** 20°F to 125°F

Standard Construction

- Frame:** 20 gauge spiral galvanized steel
- Blade:** 20 gauge galvanized "V" blade
- Bushings:** oil impregnated bronze



- Actuator** 24 Volt, 4 watt
drive open / drive close, 6 Va.

Size Information

- Minimum Size:** 4"
- Maximum Size:** 16"
- Shell Length:** 10" or diameter, whichever is greater

Options (at additional costs)

- EDPM Seals (175° F)
- R-316 Auto Changeover Relay
- Larger sizes, use model 4075

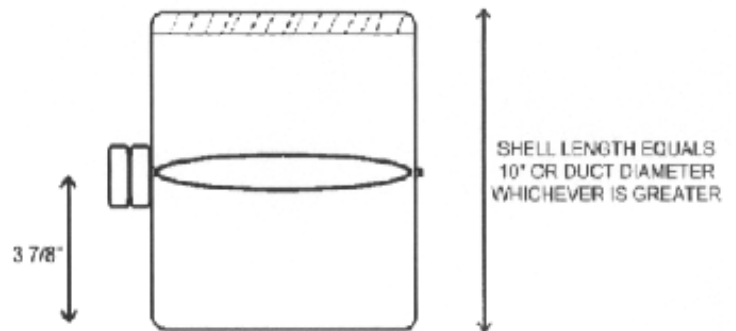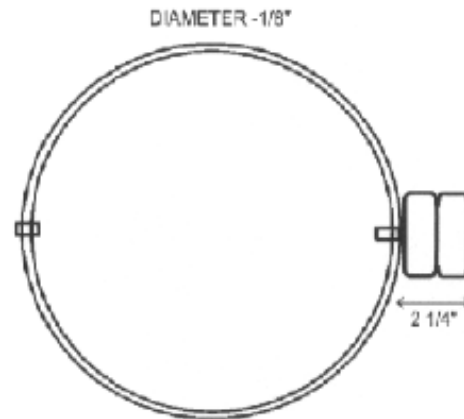

| QUANTITY | DIAMETER | |
|------------|----------|------------------|
| | | |
| | | |
| | | |
| | | |
| | | |
| PROJECT | | LOCATION |
| CONTRACTOR | | DESIGN SPECIFIER |