



Young Regulator Co.

7100 Krick Rd • Walton Hills, OH 44146

P: 440-232-9700 • F: 440-232-8266

www.youngregulator.com

Submit BCW – 1-10

BCW - Bowden Casing & Wire


Instructions To Cut To Length

030-12 CONTROL WRENCH

Application and Design

BCW consists of .054" stainless steel control wire with a tensile strength of at least 200,000 lbs. that is encapsulated in 1/16" flexible galvanized spiral wire sheath. Stainless steel sheath is an option.

BCW can be ordered from the factory cut to length, but when distance between the damper and the location of the controller is uncertain, you can order it in bulk lengths and cut it in the field. Standard bulk length is 50', but 100' lengths can be special ordered.

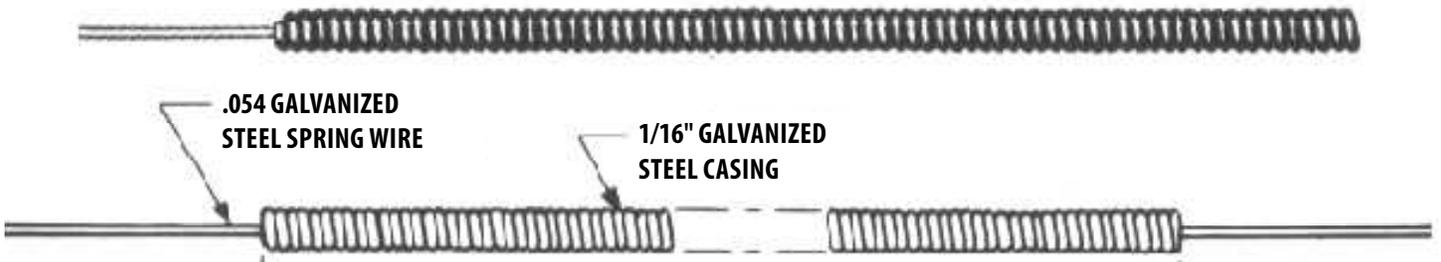

BOWDEN CABLE CONTROLS *Instructions to cut to length*

The stainless steel inner wire of the BCW should be approximately 6" longer than the galvanized spiral steel outer casing to enable fastening the wire to the lever arm and to the controller. An extra 3" of wire are needed on each end of the casing.

It is difficult to cut the casing without the cutting the wire, so pull out approximately 6" of the wire from one end.

With a sharp offset diagonal cutting pliers, cut the other end of the BCW to length. Push the extra length of inner wire in half way to expose 3" of wire on both sides of the length of casing.

On the controller, insert the inner wire into the hole in the wire stop (barrel nut) and tighten screw until wire bends. Secure the casing into the casing clamp.

On the damper, install casing coupler onto center hole on angle bracket with the keps nut. Push casing into casing coupler and tighten the thumbscrew to secure the casing to the bracket. Push wire through casing and insert it into wire stop on the lever arm and tighten the screw.



030-12

CONTROL WRENCH

BCW ORDERED IN BULK 50' LENGTHS, OR CUT TO LENGTH

QUANTITY	LENGTH (FT)	NOTES

PROJECT	LOCATION
CONTRACTOR	DESIGN SPECIFIER